

IN-SURE® LEVER

WIRE CONNECTORS



IDEAL
electrical™

IN-SURE[®] LEVER



WIRE CONNECTORS

Secure Connections Insert. Close. Connect.

Levered wire connectors provide the perfect solution for joining solid and stranded wires. These versatile connectors have a compact design that takes up minimal space in junction boxes and enclosures.

Features:

- Secure, reliable and reusable
- Releasable connector for solid & stranded wires
- Modern alternative to traditional connectors
- Clear housing allows verification of connection
- Continuity check port and strip length guide
- Compact design for tight spaces
- For use with Cu/Cu combinations only
- Temperature 105°C max (221°F)
- Solid wires can be inserted without opening lever (models L22, L23 & L25)

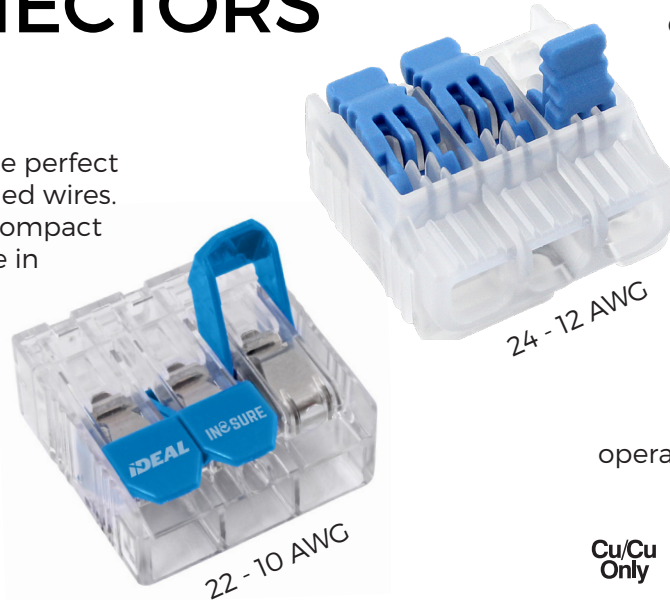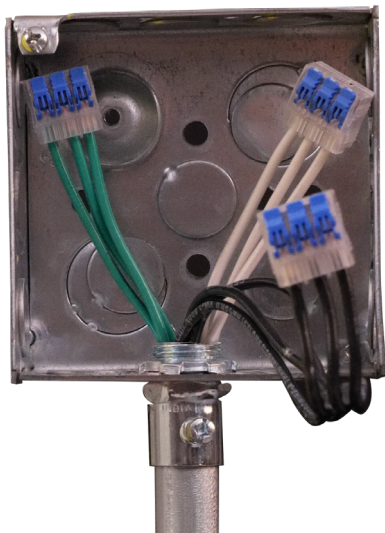

SECURE CONNECTION

Optimized spring design for easy open and strong bite

CONFIDENCE

Clear housing for visual inspection of work







REUSABLE

Solid and stranded wire – tackle wide range of jobs

EASE OF USE

Better grip, single lever operation for less stress on hands



DESCRIPTION	PART #	AMPS	DETAILS
 L22 2-Port	Box of 150	30-10L22	20A
	Jar of 500	30-50L22J	
	Box of 4,000	30-16L22	
 L23 3-Port	Box of 100	30-10L23	20A
	Jar of 350	30-35L23J	
	Box of 2,500	30-16L23	
 L25 5-Port	Box of 75	30-10L25	20A
	Jar of 200	30-20L25J	
	Box of 1,500	30-16L25	
 L32 2-Port	Box of 100	30-10L32	30A
	Jar of 350	30-35L32J	
	Box of 1,000	30-16L32	
 L33 3-Port	Box of 75	30-10L33	30A
	Jar of 225	30-25L33J	
	Box of 1,000	30-16L33	
 L35 5-Port	Box of 50	30-10L35	30A
	Jar of 125	30-15L35J	
	Box of 500	30-16L35	

*1,000V MAXIMUM IN FIXTURES AND SIGNS.
COPPER-TO-COPPER ONLY. DO NOT USE ON ALUMINUM.

WARNING: Improper use or installation of this product may cause fire, electrocution, serious personal injury or death. Shut off power to the circuit or remove fuse before using this product. Use only connectors properly sized to the wiring being used. Consult local building codes for installation requirements.

P-6064 (10-24)
©IDEAL INDUSTRIES, INC.

IDEAL CUSTOMER SERVICE:
orderdesk@idealindustries.com
1-800-824-3325
idealind.com

